



**SR1 DAMPER SPRING SPECIFICATION**

**PRIORITY – HIGH (ACTION)**

Following a supplier issue, customers are advised to check the spring rates fitted to their SR1 cars. Due to a supplier quality issue some springs may have been miss labeled with the incorrect spring rating. Production specification for the SR1 springs are 300lb springs front, 250lb rear.

Springs can be identified by measuring the coil diameter or by looking at the number of coils per spring.

	Spring rating	Coil diameter (approx.)	Number of coils	Coil start-finish point
<b>Front</b>	300lb	9.5mm	8	12 o'clock-12 o'clock
<b>Rear</b>	250lb	10.2mm	7.5	12 o'clock-6 o'clock

300lb springs have close to 8 full coils and therefore when viewed from above the start-finish point of the coils will be **12 o'clock to 12 o'clock**.

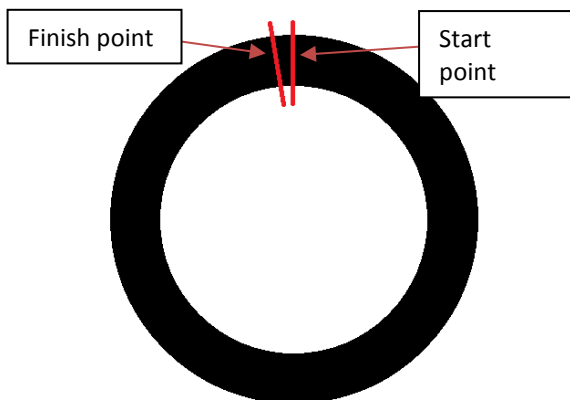


Figure 1 - 300lb spring view from above

250lb springs have close to 7.5 full coils and therefore when viewed from above the start-finish point of the coils will be **12 o'clock to 6 o'clock**.

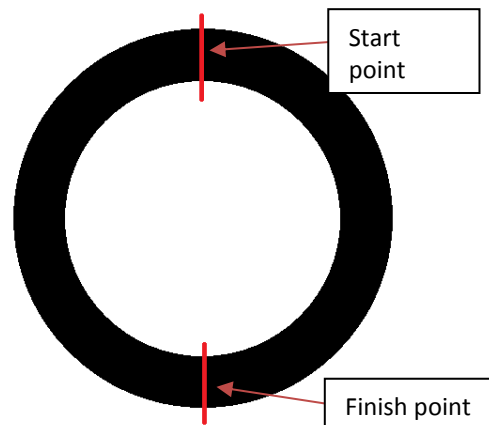


Figure 2 - 250lb spring vied from above

If customers do notice their springs are incorrect, please contact our stores department.

[stores@radicalsportscars.com](mailto:stores@radicalsportscars.com)

Technical Department  
Radical Sportscars

Mobile: +44 (0)7876 146854  
Tel: +44 (0)1733 331616 ext. 263  
Email: [technical@radicalsportscars.com](mailto:technical@radicalsportscars.com)



**RADICAL**